

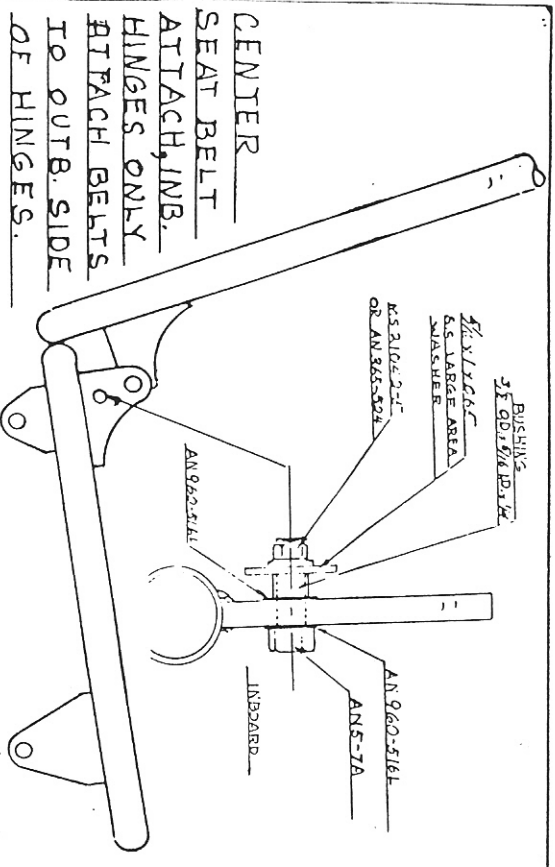


TRIPLE SEATING FOLDING SEAT.

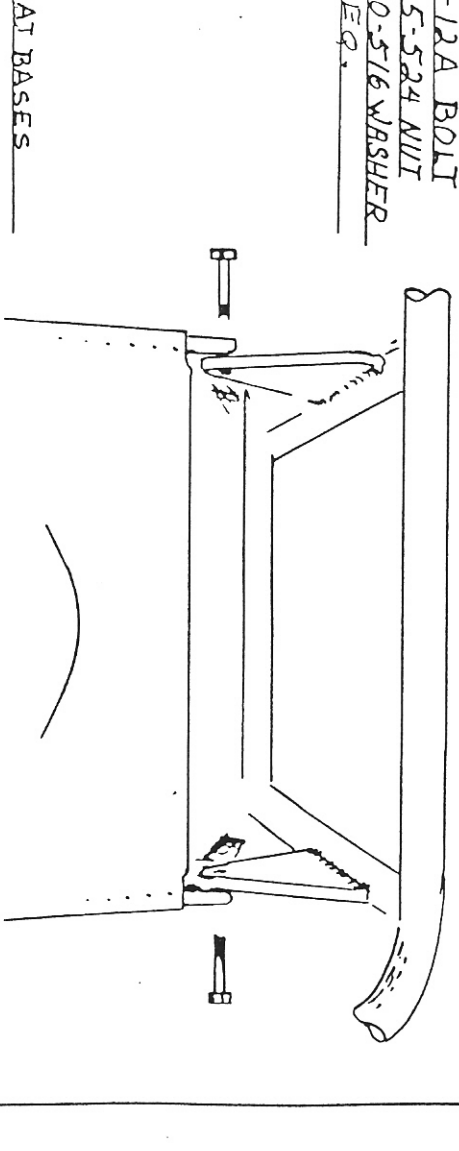

THIS SEAT WHEN INSTALLED IN THE DE HAVILLAND DHC-2 BEAVER
 WILL SEAT THREE PASSENGERS. THE TWO OUTBOARD PASSENGER
 SEAT BELTS ARE ATTACHED TO THE FLOOR, THE CENTER
 PASSENGER SEAT BELT WILL BE ATTACHED TO THE SEAT.
 THE SEATS ARE CONSTRUCTED SO THEY MAY BE
 SEPARATED SO A SINGLE SEAT MAY BE INSTALLED.
 THE CUSTOMER MAY ORDER THEIR SEAT ASSY. TO HAVE THE SINGLE
 SEAT ON THE RH. OR LH. SIDE OF THE CABIN.
 TO INSTALL SEATS: PLACE THE SEAT ASSY. WITH THE HOOKS INSERTED
 IN THE SLOTTED RECEPTACLE ON THE FLOOR. SLIDE SEATS FORWARD
 TILL THE LOCK AT FRONT OF SEAT BASES LOCK IN THEIR RECEPT-
 ACLES. CHECK SEATS FOR SECURITY BY PUSHING SEATS AFT.

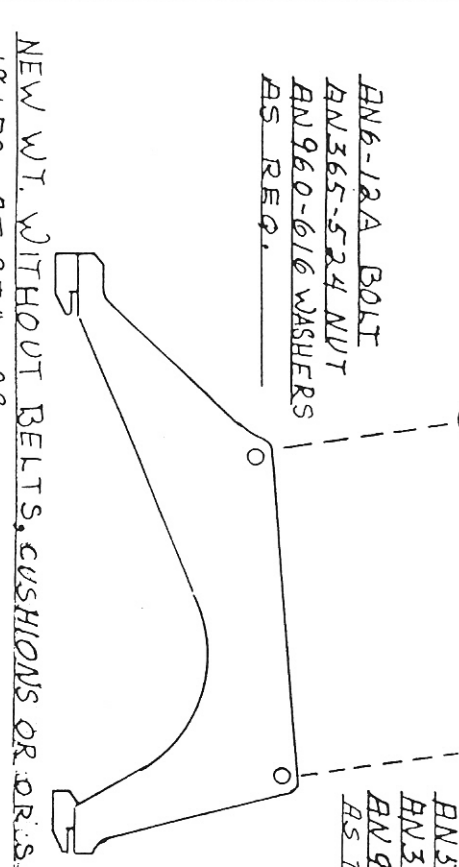

NEW WT. WITHOUT BELTS, CUSHIONS OR DR. SEAT BASES
 18 LBS AT STA - 29.
 TORQUE $3/8-24$ 200 MIN. 250 MAX.
 $5/16-24$ 180 MIN. 145 MAX.

NOTE: THE SEAT BELT ATTACHMENT
 ON THE FLOOR IS A SEPARATE STG.
 APPROVAL & MAY BE PURCHASED FROM
 E. ATLEE DODGE.

INSTALLATION INSTRUCTIONS

F. ATLEE DODGE
 P.O. BOX 190409
 ANCHORAGE, AK
 99519

FOLDING SEAT
 CENTER SEAT DE HAVILLAND DHC-2

REV	REVISION	DATE	BY

F. ATLEE DODGE P.O. BOX 190409 ANCHORAGE, AK 99519	REDRAWN 6-15-89	SCALE NONE	SHEET 1 OF 1 DWG NO 3180-1	CHG
-------------------------------------------------------------	--------------------	---------------	-------------------------------	-----